


TECHNISCHE GEGEVENS

		PUMA-55	PUMA-80	PUMA-110	PUMA-165	PUMA-220
Capaciteit	kN	550	800	1100	1650	2200
Maximale capaciteit snelwisselsysteem	mm	Ø 40 x 10	Ø 40 x 14	Ø 40 x 20	Ø 40 x 30	Ø 40 x 40
	mm	500	510	500	510	510
Uitlading	mm	750	750	750	760	800
	mm					
SPECIFICATIE VOOR DE ZWANENHALS MATRIJSHOUDER						
I on the wing	mm	100-300	100-300	100-450	100-450	100-450
I on the core	mm	100-500	100-500	100-500	120-500	120-500
U on the wing	mm	100-300	100-300	120-400	120-400	120-400
U on the core	mm	120-260	120-380	120-400	120-400	120-400
ALGEMENE SPECIFICATIE						
Vermogen	KW	5	9	9	15	20
Aantal slagen per minuut bij ingestelde slaglengte van 20 mm		37	40	28	28	25
Maximale slaglengte	mm	60	70	80	100	100
Werkhoogte "S" / "SD"	mm	1060 / 810	1094 / 1194	991 / 1066	1060 / 1060	1013 / 1013
Netto gewicht "S" / "SD"	Kg	1150 / 1885	1715 / 2115	3150 / 3970	4290 / 4525	5200 / 5500
Bruto gewicht "S" / "SD"	Kg	1320 / 2100	1925 / 2350	3400 / 4300	4700 / 5000	5700 / 6000
Inhoud verpakking : "S"	m	1.55 x 1.2 x 1,95	1.7 x 1.3 x 2.05	2.08 x 1.3 x 2.05	2.03 x 1.3 x 2.05	2.56 x 1.6 x 2.35
	"SD"	m	1.93 x 1.2 x 1.8	2.1 x 1.3 x 2.15	2.28 x 1.3 x 2.3	2.03 x 1.6 x 2.35
Zettransport "S" / "SD"	m³	3.63 / 4.17	4.53 / 5.87	5.55 / 6.82	7.31 x 8.95	9.63 / 10
EXTRA TOEBEHOREN						
PIJPUITKAPPER						
Maximale diameter	mm	60	60	60	60	60
PONSINSTALLATIE VOOR GROTERE DIAMETERS						
Maximale diameter	mm	Ø 100 x 4	Ø 100 x 6	Ø 100 x 8	Ø 100 x 12	Ø 100 x 16

- Capaciteiten gebaseerd op een materiaalweerstand van 45 Kg/mm²

- Door voortdurende ontwikkeling van GEKA zijn wijzigingen in maten en uitvoering voorbehouden

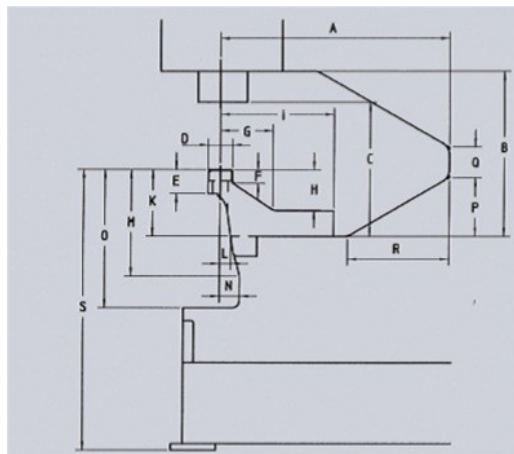

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
PUMA-55	S	500	340	270	65	55	33	120.5	81	233.5	81	137	25	231	45	327	102	78	185	1060
	SD	750	340	270	65	55	33	120.5	81	233.5	81	137	25	231	45	327	102	78	185	810
PUMA-80	S	510	370	300	65	62	31	123	89	253.5	89	144	25	234	45	304	130	70	234	1094
	SD	750	370	300	65	62	31	123	89	253.5	89	144	25	234	45	304	130	70	278	1194
PUMA-110	S	500	420	350	79	79	40	140.5	96	267	96	161	25	326	47	461	95	125	100	991
	SD	750	420	350	79	79	40	140.5	96	267	96	161	25	326	47	461	95	125	100	1066
PUMA-165	S	510	450	350	85	79	35	158	104	430	160	200	25	372	45	450	0	240	0	1060
	SD	760	450	380	85	79	35	158	104	430	160	200	25	372	45	450	141	98	245	1060
PUMA-220	S	510	450	375	85	79	35	162	100	435	151	198	30	-	30	483	0	330	0	1013
	SD	800	450	375	85	79	35	162	100	435	151	198	30	-	30	483	125	200	216	1013

- afmetingen in mm